
HEXACELL COLLECTION

ZIP SEAL BLACKOUT BLINDS

Hexacell NocLiteX ZIP Seal

Product reference: NocLiteX ZIP Seal

An internal manual blackout system with ZIP-retained fabric edges and a four-sided frame. Designed for an accurately assessed window recess.

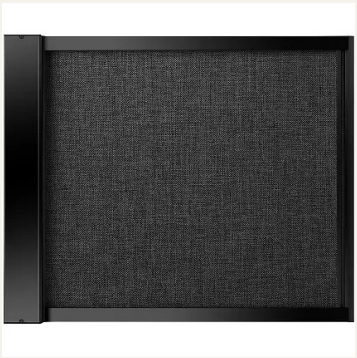

- ZIP-retained fabric edges
- Cassette, side channels and terminating channel form a complete frame
- Three manual opening configurations

Key specifications

Specification	Detail
Operation	Manual
H-Screen size range	Width 500-1500 mm; drop 500-2200 mm
V-Screen, one-way size range	Width 500-2400 mm; drop 500-2400 mm
V-Screen, split size range	Width 1000-4800 mm; drop 500-2400 mm; two headboxes and moving assemblies
Cassette dimensions	76 mm high × 72 mm deep
Side and terminating channels	25 × 25 mm
Profile colours	White or Black; internal components are black
Fabric series	82133, 82179, 82180 and 82183; current colours confirmed on enquiry
Fitting position	Inside recess only

View the current choices and request a quotation

07849 709975 | info@adamsblinds.co.uk

www.adamsblinds.co.uk/hexacell-collection/

Options to discuss

• H-Screen, one-way V-Screen or split V-Screen

• White or Black profiles

• Standard or reverse headbox orientation

• Screw fixing or assessed rubber-foam no-screw fitting

Before you order

• The finished blind cannot be trimmed down after manufacture.

• Blackout performance depends on correct sizing, assembly, perimeter sealing and installation.

• An internal system; no outdoor wind rating is claimed.

• Fabric colours and fire-performance requirements need confirmation before order.

The recess is part of the specification

Depth, squareness and the perimeter finish all affect the result. NocLiteX is an inside-recess product: it should not be specified as a standard face-fixed or outside-recess blind. Send photographs showing the full reveal and the intended operating position.

A complete perimeter helps control light

The moving rail meets a terminating channel, with a magnetic strip helping the closure. Black components are used within the assembly, even with white profiles. Any gap between the outer frame and the surrounding opening must also be addressed.

Keep the serviceable side accessible

The headbox can face towards the room or the window. This changes access to the spring-adjustment screw. The chosen orientation should suit both the appearance and the installer’s access requirements.

Select the fabric with the job in mind

The published fabric series are 82133, 82179, 82180 and 82183. Request the current colour cards and any required documentation. Fire performance, cleaning restrictions and exact material suitability are confirmed for the quoted selection.

View the current choices and request a quotation