
PERFECT FIT INTERNATIONAL SYSTEM
FOR PLEATED ROOF & SIDE BLINDS

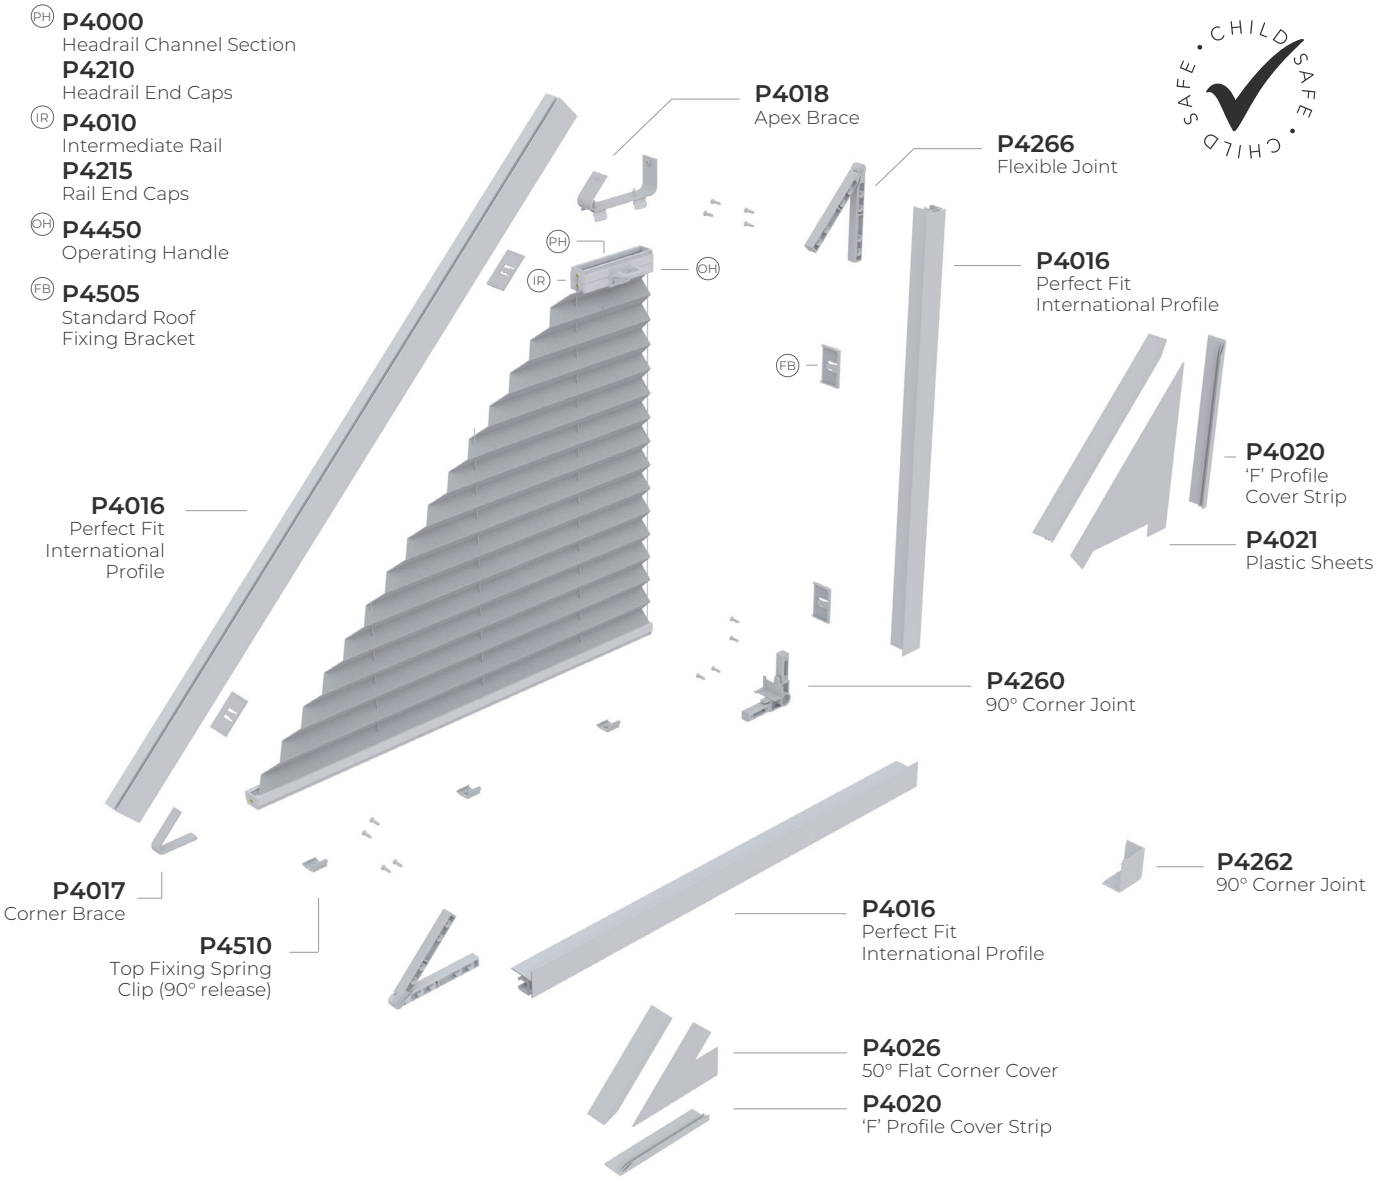


PERFECT FIT INTERNATIONAL PLEATED SYSTEM

- Designed and manufactured in the UK, all Louvolite systems are 10 year life cycle tested to ensure long lasting performance.
- For the angled shapes of roof windows or side windows.
- The blind within the Perfect Fit frame clicks into uPVC windows using window fixing brackets and can easily be removed.
- No drilling or screwing needed for installation.
- Reduces the gaps and light strike at the edge of the blind.
- Standard bracket and multi roof bracket cover bead depths from 12-22 and recess over 22.
- Manufactured using high quality engineering grade polymer and aluminium.
- Uses a manual operating handle and detached 2m operating wand with twist lock P4461/2
- Can be motorised using Louvolite One Touch® Cellular motor P4600.


PERFECT FIT INTERNATIONAL PLEATED

Perfect Fit International
P4016 Frame Section





Perfect Fit
P4000 Channel Section, Headrail





HARDWARE SPECIFICATION

Perfect Fit International Pleated System

Our Perfect Fit International pleated blinds are manufactured using the specifically designed aluminium profiles and headrails.

The specified fabrics are held between the headrail and intermediate rail.

The plastic operating handle is used with a 2m metal operating wand. The mild steel window fixing brackets are zinc plated and powder coated.

Performance

To ensure a positive performance, all Louvolite Perfect Fit systems are designed and manufactured in the UK using prime quality plastic materials and a dedicated steel locking spring.

10 year life cycle testing is done to ensure long lasting performance.

The Perfect Fit frame clips into position using our patanted spring brackets that come in various sizes to accomodate the window and door systems available within the market.

Operation

Perfect Fit systems are 'Safe by design' and comply with BS EN13120.

Maintenance

All of the Perfect Fit system components are manufactured using aluminium, treated steel and plastic. They do not present any corrosion problems in normal environments. The system has been designed for a smooth operation, together with a rigidity to prolong the window blind's working life.

Your Louvolite Distributor



CI/SfB 1976 reference by SfB Agency
(76.7) X

For more information view the online pdf at www.louvolitecommercial.com/systems/