
PRODUCT SELECTION / INTERIOR FOLDING DOORS

Bespoke Glazing Door

A solid-timber bifold frame with glazing apertures arranged to suit the design, supplied with the glazing scope clearly defined.

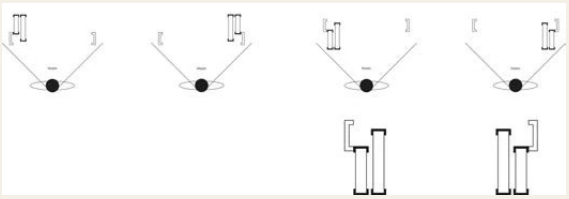

Product illustration. The agreed specification and finish determine the supplied product.

The Bespoke Glazing Door is built around a solid-timber frame and an agreed pattern of openings for glass. It can be considered where the proportions of the glazed areas are important to the interior design.

The base construction uses two or four folding leaves that sit flat when closed. The glass is not automatically part of that base supply; its specification and supply responsibility are agreed before the order proceeds.

- A timber frame designed around the glazing pattern
- Clear scope for glass and hardware
- Folding or separately assessed sliding arrangements

At a glance

Frame material	Solid timber
Leaves	Two or four in the listed folding format
Glazing pattern	Apertures arranged within construction limits
Glass	Separately specified and quoted
Hardware	Metal hinges and specified guide system

Selection guide, not a technical certificate or confirmed order specification. Dimensions, finishes and availability are agreed in your quotation.

BESPOKE GLAZING DOOR

Planning your specification

Options to discuss

- Agreed number and arrangement of glazing apertures
- Compatible timber stains or paints
- Opening direction and locking detail
- Selected sliding configuration by quotation

Practical points

- Glass is not included by default in the base frame supply.
- Aperture sizes and glass requirements must be coordinated.
- Special performance requirements need a confirmed complete specification.

Design the aperture pattern before manufacture

The timber sections can be arranged around a proposed number and size of glazing openings, within the limits of the construction. A simple larger aperture and a set of smaller panes produce very different appearances.

We confirm the timber finish and the dimensions needed for the selected glass. The glazing must suit the intended use and any project safety requirements. A finished frame should not be ordered on the assumption that any glass can be fitted into it afterwards.

Coordinate the hardware and movement

The listed system uses metal hinges, a guide-and-carrier arrangement and coordinated timber closing details. Suitable locking can be discussed. Opening direction and the folded position determine how the assembly works within the room.

A sliding version may be assessed as a separate configuration. For a full supply and installation project, we establish the measured opening, supporting structure, glass scope and final fit together. This keeps responsibility for the complete assembly clear and prevents gaps between the door and glazing orders.

Ask about Bespoke Glazing Door

Send your postcode, approximate quantity, opening sizes and photographs. Tell us whether you need supply only or measuring and installation.

View the product and request a quotation

info@adamsblinds.co.uk | 07849 709975