
PRODUCT SELECTION / EXTERIOR SHADING

Outdoor Aluminium Venetians

Exterior Venetian blinds with extruded aluminium slats, adjustable light control and a guided operating arrangement specified for the building.

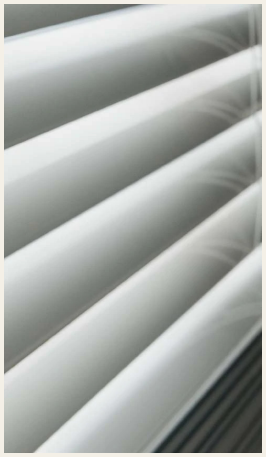

Product illustration. The agreed specification and finish determine the supplied product.

Outdoor Aluminium Venetians place adjustable slats outside the glazing. They provide a different approach from an interior blind, allowing the angle of the screen to be changed while keeping a defined horizontal appearance.

The construction uses extruded aluminium rather than timber. It is a useful option to compare where the project calls for a metal finish, a guided blind and a suitable crank or motor operating system.

- Adjustable shading outside the glazing
- A genuine metal slat construction
- A coordinated guide and operating system

At a glance

Slat material	Extruded aluminium
Slat widths	50 or 80 mm in the listed range
Operation	Suitable crank or motor system
Guidance	Exterior side-guide arrangement specified for the opening

Selection guide, not a technical certificate or confirmed order specification. Dimensions, finishes and availability are agreed in your quotation.

OUTDOOR ALUMINIUM VENETIANS

Planning your specification

Options to discuss

- Compatible aluminium finishes
- Crank operation
- Motor operation with specified controls
- Suitable headrail cover and guide detail

Practical points

- Exterior exposure and permitted operating conditions must be assessed.
- Dimensions depend on the slat and operating system.
- Electrical and access requirements are confirmed in the project scope.

Select the slat and operation together

The listed range includes 50 and 80 mm slat widths. Slat size, blind weight and the operating system influence the acceptable dimensions, so the correct combination is selected for the opening rather than assumed from a single maximum size.

Crank and motor arrangements are available to discuss, together with side guidance and suitable headrail details. The route for a crank or electrical connection must be planned before the installation is ordered.

Assess the exterior position

An exterior blind is exposed to the conditions around the building. Wind, the height above ground, access for fitting and the supporting façade all matter. We confirm the suitability and operating restrictions for the proposed position; no universal wind rating is implied by the product name.

A survey also establishes where the raised blind will sit, whether a cover is needed and how the installation will be maintained. If automatic control is requested, the proposed motor, control method and any protective sensor arrangement are specified as part of the project.

Ask about Outdoor Aluminium Venetians

Send your postcode, approximate quantity, opening sizes and photographs. Tell us whether you need supply only or measuring and installation.

View the product and request a quotation

info@adamsblinds.co.uk | 07849 709975